



## J4C Series

4 Socket Mini-MIL Connector with Rubber Bending Strain Relief, for use with CTC 4 Pin Triaxial Accelerometers, Polyurethane Molded, Portable Measurement, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



### Product Features

- ▶ 4 Socket Mini-MIL Connection for use with CTC Triaxial Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

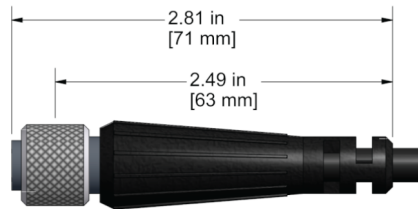

### Specifications

Application	Portable Measurements
Max Temperature	250° F (121° C)
Connector Type	4 Socket Mini-MIL
Strain Relief	Rubber Bending Strain Relief
Shell Material	Polyurethane Molded
Connector Insert Material	Polyurethane
Rating	IP68
Pin-Out	Socket A = Ch. Y (+), Red Conductor Socket B = Ch. X (+), Green Conductor Socket C = Ch. Z (+), White Conductor Socket D = Common (-), Black Conductor

**Built to Order**